



## eFS30 Series – Isolated AC/DC Converters

85 – 264Vac Input, Maximum Power: 30W

Data Sheet  
Jul 01, 2015

### eFS30 Series –small size isolated AC/DC converters

#### Features

- Encapsulated, compact case
- High Efficiency
- Low input current at no load  
(0.2W@220VAC)
- Universal input range
- Built in EMI Filter
- Inrush current limit
- Over current protection
- Over voltage protection (Latch)
- Output short circuit protection
- Input – Output Isolated
- Safety agency approval  
CE (EN 60950) through TÜV
- RoHS directive



#### Applications

- Telecommunication
- Datacom
- Instrumentation
- Distributed Power System

#### Description

eFS30 Series is a High Efficiency AC/DC Converter that provides up to 30 watts of output power in ultra compact size. This module operate a burst mode below a given output power and it offers a high efficiency at light load. Burst mode occurs below typically 20~25% of rated out power. It can cause an acoustic noise and high output ripple voltage. This module has an over current and over voltage protection mode and wide operating temperature range from -10°C to +50°C.



**eFS30 Series – Isolated AC/DC Converters**  
85 – 264Vac Input, Maximum Power: 30W

Data Sheet  
Jul 01, 2015

## Absolute Maximum Ratings

| Parameter                     | Min | Typ | Max  | Unit | Notes |
|-------------------------------|-----|-----|------|------|-------|
| Input Voltage Continuous      | 85  | -   | 264  | VAC  |       |
| Operating Ambient Temperature | -10 | -   | 50   | °C   |       |
| Storage Temperature           | -20 | -   | 70   | °C   |       |
| I/O Isolation Voltage         | -   | -   | 3000 | VAC  |       |

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device

## Electrical Specifications

### Input Characteristics

T<sub>A</sub> = +25°C, V<sub>in</sub> = 85 ~ 264VAC After warm up unless otherwise specified

| Parameter                      | Symbol          | Min | Typ        | Max                | Unit               |
|--------------------------------|-----------------|-----|------------|--------------------|--------------------|
| Operating voltage Range        |                 | 85  |            | 264                | Vac                |
| Input current (@ 220V / @110V) | I <sub>in</sub> |     |            |                    | A                  |
| eFS30-3R3                      |                 |     | 0.25(0.42) |                    |                    |
| eFS30-5                        |                 |     | 0.34(0.58) |                    |                    |
| eFS30-12                       |                 |     | 0.33(0.56) |                    |                    |
| eFS30-15                       |                 |     | 0.31(0.54) |                    |                    |
| eFS30-24                       |                 |     | 0.31(0.54) |                    |                    |
| eFD30-1212                     |                 |     | 0.34(0.58) |                    |                    |
| eFD30-1515                     |                 |     | 0.34(0.57) |                    |                    |
| No load Input Power            |                 |     |            |                    | W                  |
| eFS30-3R3                      |                 |     | 0.2        |                    |                    |
| eFS30-5                        |                 |     | 0.2        |                    |                    |
| eFS30-12                       |                 |     | 0.2        |                    |                    |
| eFS30-15                       |                 |     | 0.2        |                    |                    |
| eFS30-24                       |                 |     | 0.2        |                    |                    |
| eFD30-1212                     |                 |     | 0.2        |                    |                    |
| eFD30-1515                     |                 |     | 0.2        |                    |                    |
| Inrush Current@Cold start      |                 |     |            | 30A max<br>60A max | @110VAC<br>@220VAC |
| Operating Frequency            |                 | 47  |            | 63                 | Hz                 |



**eFS30 Series – Isolated AC/DC Converters**  
**85 – 264Vac Input, Maximum Power: 30W**

Data Sheet  
 Jul 01, 2015

### Output Characteristics

T<sub>A</sub> = +25°C, V<sub>in</sub> = 85 ~ 264VAC After warm up unless otherwise specified

| Parameter   | Symbol         | Min  | Typ                    | Max   | Unit |
|---|----------------|------|------------------------|-------|------|
| Output Voltage tolerance  | V <sub>o</sub> | -    | -                      | ±2    | %    |
| Output Current  | I <sub>o</sub> |      |                        |       |      |
| eFS30-3R3   |                |      |                        | 6     | A    |
| eFS30-5   |                |      |                        | 6     | A    |
| eFS30-12  |                |      |                        | 2.5   | A    |
| eFS30-15  |                |      |                        | 2.0   | A    |
| eFS30-24  |                |      |                        | 1.25  | A    |
| eFD30-1212  |                |      |                        | ±1.25 | A    |
| eFD30-1515  |                |      |                        | ±1    | A    |
| Output Regulation;  |                |      |                        |       |      |
| - Line Regulation   |                | -    | -                      | ±1    | %    |
| (From minimum input voltage to maximum input voltage, constant load)                              |                |      |                        |       |      |
| - Load Regulation   |                | -    | -                      | ±1    | %    |
| (From no load to maximum load, Constant load)   |                |      |                        |       |      |
| Output Current Limit  |                | >105 |                        |       | %    |
| (Automatic recovery)  |                |      |                        |       |      |
| Output Ripple and noise   | mVp-p          | -    | 1% of V <sub>out</sub> |       | mV   |
| (V <sub>in</sub> = 24V, and I <sub>o</sub> = Max Output Current Bandwidth 20MHz, 1uF Ceramic cap) |                |      |                        |       |      |
| Efficiency  |                |      |                        |       |      |
| eFS30-3R3   |                |      | 77                     |       | %    |
| eFS30-5   |                |      | 81                     |       | %    |
| eFS30-12  |                |      | 85                     |       | %    |
| eFS30-15  |                |      | 87                     |       | %    |
| eFS30-24  |                |      | 88                     |       | %    |
| eFD30-1212  |                |      | 86                     |       | %    |
| eFD30-1515  |                |      | 87                     |       | %    |
| (100% of max I <sub>o</sub> , V <sub>in</sub> = 220VAC)   |                |      |                        |       |      |

**eFS30 Series – Isolated AC/DC Converters**  
85 – 264Vac Input, Maximum Power: 30WData Sheet  
Jul 01, 2015

|  |  |   |   |                            |    |
|--|--|---|---|----------------------------|----|
| Dynamic Load Response<br>(1uF Ceramic<br>25% to 50 %, 50% to 25%,<br>Slew rate = 0.05A/us) |  |   | ± | 3% of<br>Output<br>Voltage | mV |
| Start – Up Time  |  | - | - | 400                        | ms |
| Hold – Up Time   |  |   |   | 10                         | ms |
| Turn – on overshoot  |  | - | - | 1                          | %  |
| Maximum output capacitance   |  |   |   |                            | μF |

**Isolation Specifications**

| Parameter  | Symbol | Min  | Typ         | Max                  | Unit              |
|--|--------|------|-------------|----------------------|-------------------|
| I/O Isolation Voltage<br>(AC500V, 1 Min)<br>- Input-Output:<br>- Input-Case:<br>- Output-case: |        |      | -<br>-<br>- | 3000<br>3000<br>1500 | VAC<br>VAC<br>VAC |
| Isolation Resistance<br>- Output-Case<br>(at DC500V at 25°C<br>And 70%RH for 1 min)            | Riso   | >100 | -           | -                    | MΩ                |
| Isolation Capacitance  | Ciso   |      |             |                      | pF                |

**General Specifications**

| Parameter             | Symbol | Min | Typ                   | Max | Unit  |
|-----------------------|--------|-----|-----------------------|-----|-------|
| Switching Frequency   |        |     | 67                    |     | KHz   |
| MTBF (MiL-HDBK- 217F) |        |     | 6.6 x 10 <sup>5</sup> |     | hrs   |
| Dimensions<br>(W.H.L) |        |     | 53 x 21.5 x 94        |     | mm    |
| Weight                |        |     | 200                   |     | Grams |



---

**eFS30 Series – Isolated AC/DC Converters**  
85 – 264Vac Input, Maximum Power: 30WData Sheet  
Jul 01, 2015**Environmental**

| Parameter                                 | Symbol | Min | Typ | Max | Unit |
|---|--------|-----|-----|-----|------|
| Operating Temperature                     |        | -10 |     | 50  | °C   |
| Operating Humidity<br>(RH non-condensing) |        | 5   |     | 95  | %    |
| Storage Temperature                       |        | -20 |     | 70  | °C   |
| Vibration @10G(98m/s <sup>2</sup> )       |        | 10  |     | 55  | Hz   |




**eFS30 Series – Isolated AC/DC Converters**  
85 – 264Vac Input, Maximum Power: 30W

Data Sheet  
Jul 01, 2015


**Characteristic Curves**  
**Efficiency Curves**

**eFS30-3R3**

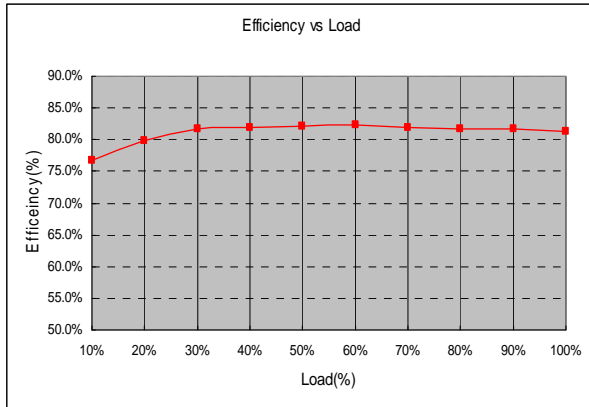


Vin=220VAC, Vo=3.3V@6A, At 25°C

**eFS30-5**

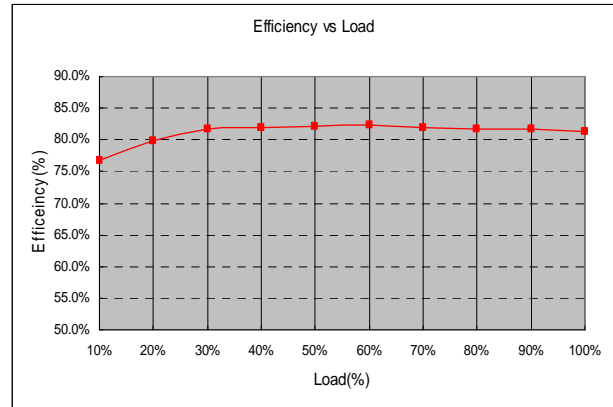


Vin=220VAC, Vo=5V@6A, At 25°C

**eFS30-12**

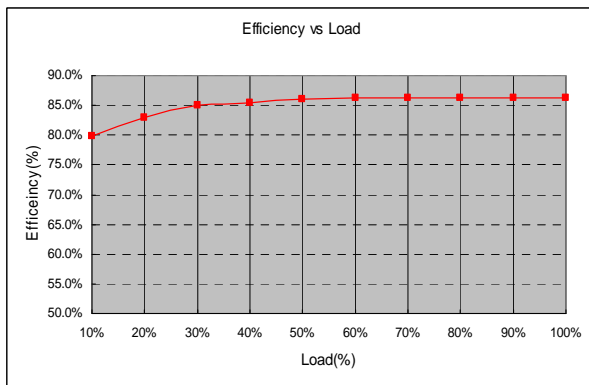

Vin=220VAC, Vo=12V@2.5, At 25°C

**eFS30-15**

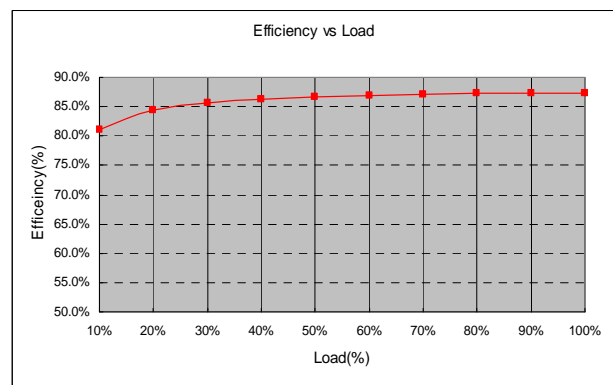

Vin=220VAC, Vo=15V@2A, At 25°C




**eFS30 Series – Isolated AC/DC Converters**  
85 – 264Vac Input, Maximum Power: 30W

Data Sheet  
Jul 01, 2015


**Efficiency Curves**

**eFS30-24**

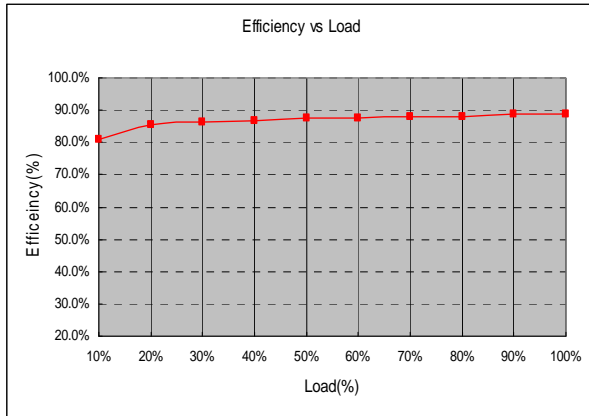


Vin=220VAC, Vo=24V @1.25A , At 25°C

**eFD30-1212**

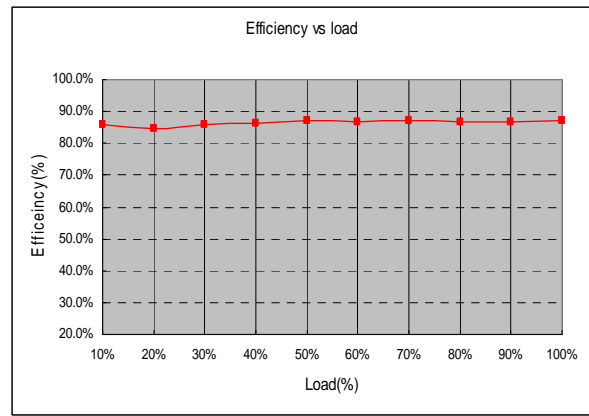

Vin=220VAC, Vo=±12V@1.25A , At 25°C

**eFD30-1515**

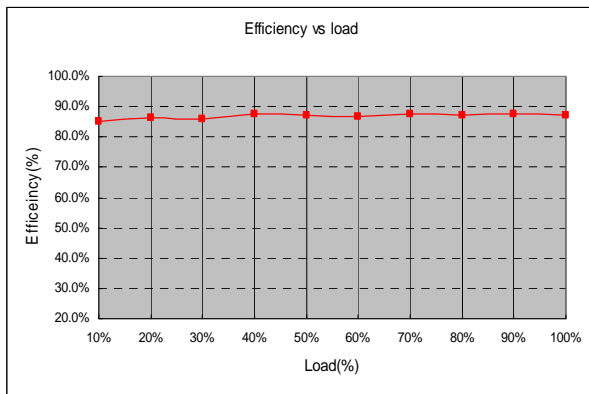

Vin=220VAC, Vo=±15V @1.0A , At 25°C




**eFS30 Series – Isolated AC/DC Converters**  
85 – 264Vac Input, Maximum Power: 30W

Data Sheet  
Jul 01, 2015


**Output Ripple & Noise**

**eFS30-3R3**

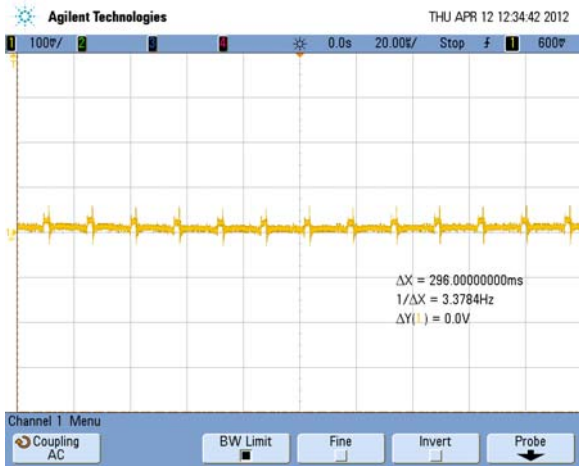


Vin=220VAC, Vo=3.3V@6A , At 25°

**eFS30-5**

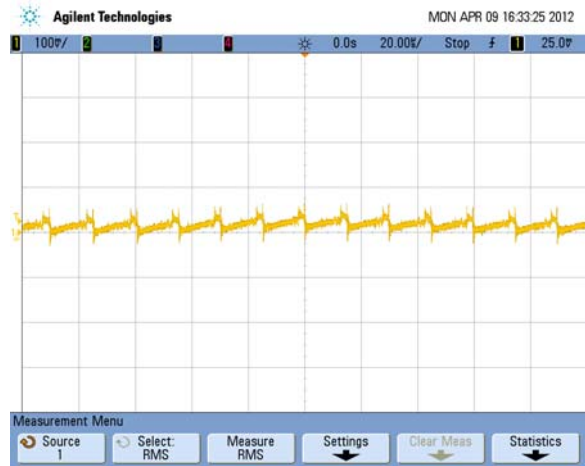


Vin=220VAC, Vo=5V@6A , At 25°

**eFS30-12**

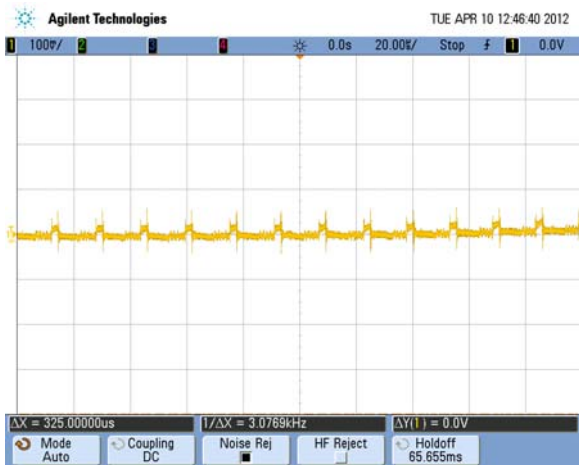

Vin=220VAC, Vo=12V@2.5A , At 25°

**eFS30-15**

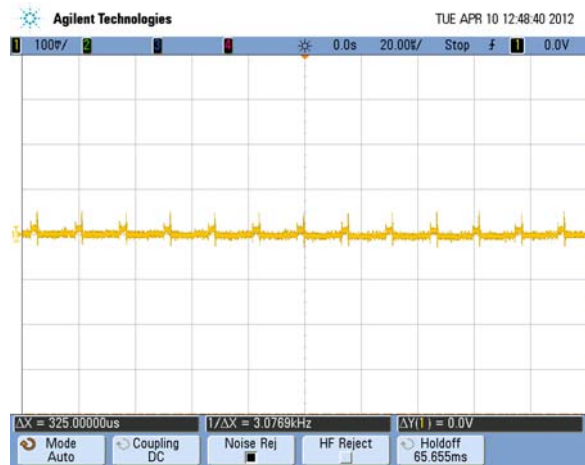

Vin=220VAC, Vo=15V@2A , At 25°






**eFS30 Series – Isolated AC/DC Converters**  
85 – 264VAC Input, Maximum Power: 30W

Data Sheet  
Jul 01, 2015


**Output Ripple & Noise**

**eFS30-24**

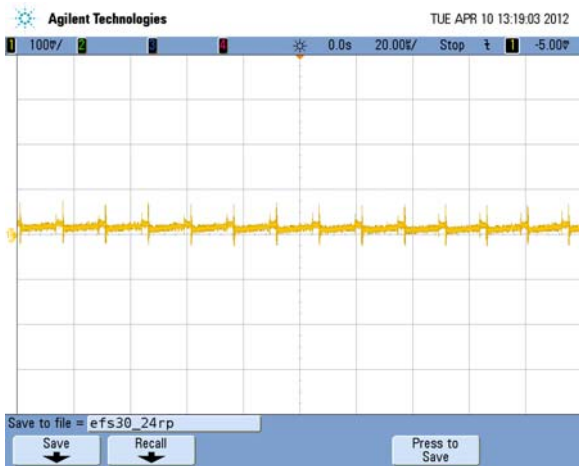


Vin=220VAC, Vo=24V@1.25A , At 25°C

**eFD30-1212**

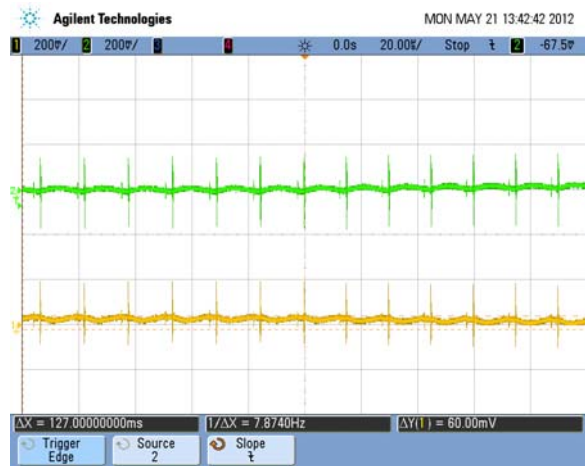

Vin=220VAC, Vo=±12V@1.25A , At 25°C

**eFD30-1515**

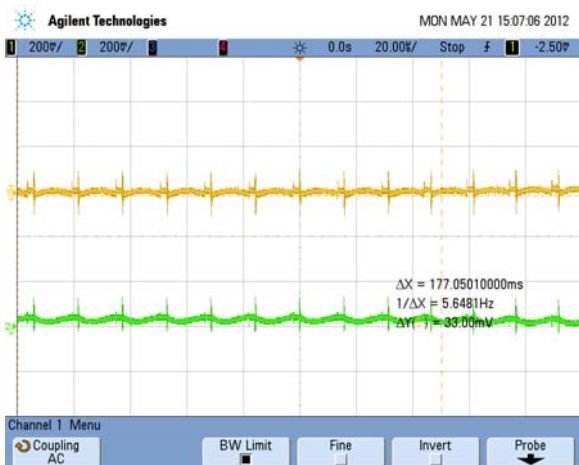

Vin=220VAC, Vo=±15V@1.0A , At 25°C



**eFS30 Series – Isolated AC/DC Converters**  
85 – 264Vac Input, Maximum Power: 30W

Data Sheet  
Jul 01, 2015


**Start-up Time**

**eFS30-3R3**




Vin=220VAC, Vo=3.3V @6A , At 25°C

**eFS30-5**

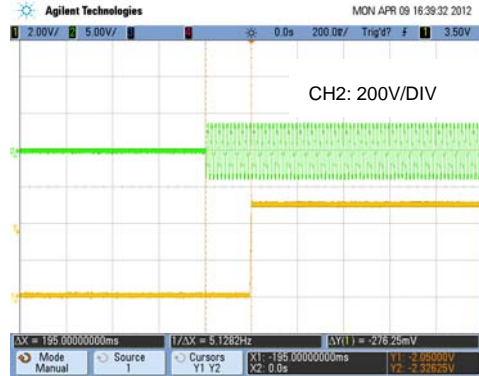


Vin=220VAC, Vo=5V @6A , At 25°C

**eFS30-12**

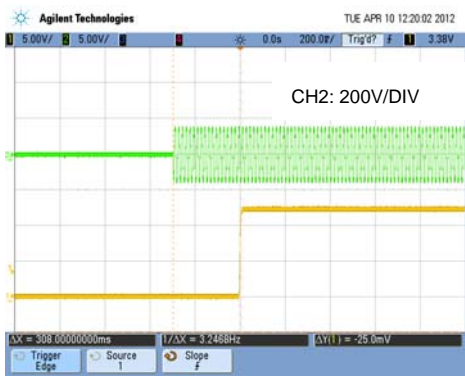

Vin=220VAC, Vo=12V @2.5A , At 25°C

**eFS30-15**

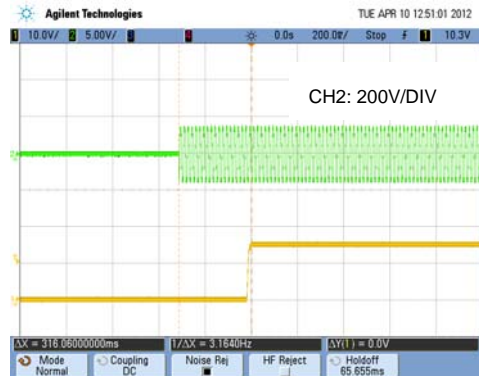

Vin=220VAC, Vo=15V @2A, At 25°C

**eFS30-24**



Vin=220VAC, Vo=24V @1.25A , At 25°C



**eFS30 Series – Isolated AC/DC Converters**  
85 – 264Vac Input, Maximum Power: 30W

Data Sheet  
Jul 01, 2015


**Hold Up Time**

**eFS30-3R3**



Vin=220VAC, Vo=3.3V @6A , At 25°C

**eFS30-12**

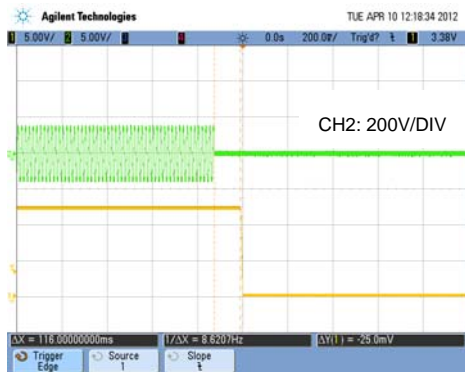


Vin=220VAC, Vo=12V @2.5A , At 25°C

**eFS30-24**




Vin=220VAC, Vo=24V @1.25A , At 25°C

**eFS30-5**

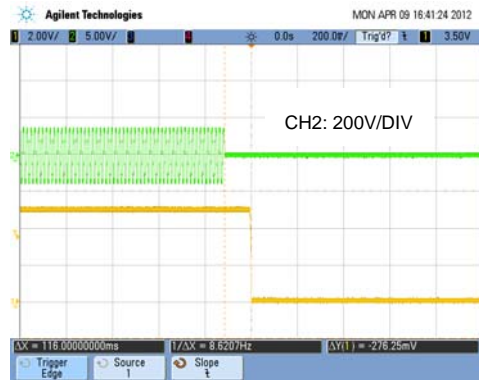

Vin = 220VAC, Vo=5V @6A, At 25°C

**eFS30-15**

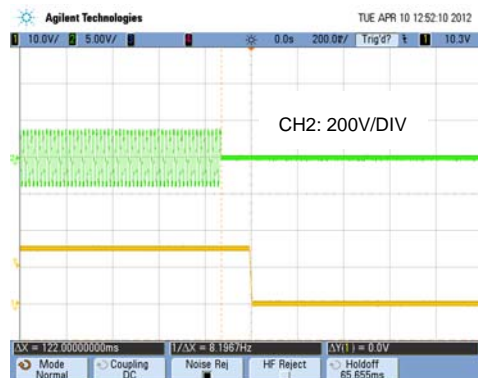

Vin=220VAC, Vo=15V @2A, At 25°C



# eFS30 Series – Isolated AC/DC Converters


85 – 264Vac Input, Maximum Power: 30W

Data Sheet  
Jul 01, 2015

## Output Load Transient Response

(Dynamic load change from 25% to 50% of full load, slew rate = 0.1A/us)

### eFS30-3R3

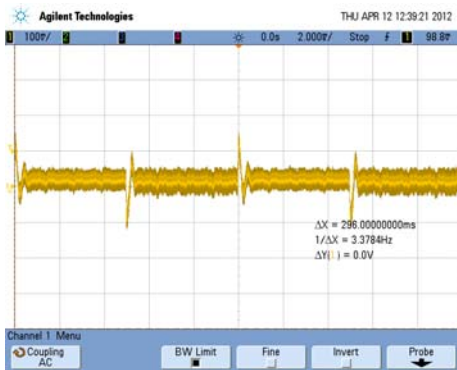


Vin=220VAC , At 25°C

### eFS30-12



Vin = 220VAC, At 25°C

### eFS30-5

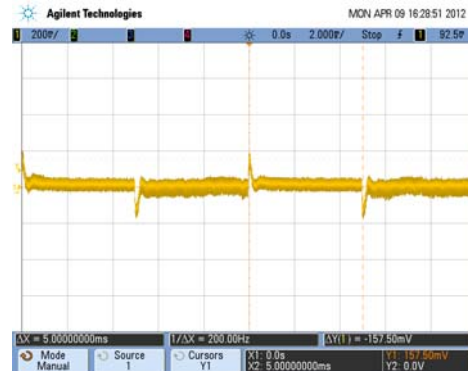

Vin=220VAC, At 25°C

### eFS30-15



Vin=220VAC, At 25°

### eFS30-24



Vin=220VAC, At 25°


## eFS30 Series – Isolated AC/DC Converters

85 – 264Vac Input, Maximum Power: 30W


Data Sheet  
Jul 01, 2015

### Instruction manual

#### Basic connection

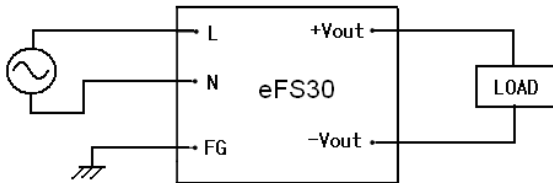


#### Output ripple and noise Test

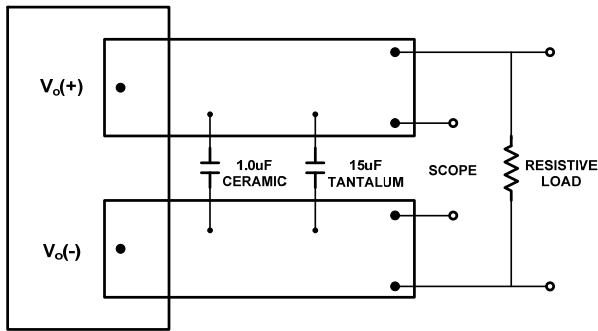

\* Conductor from Vout-pins to capacitors = 50mm (1.97in)


#### Parallel operation

Parallel operation is available by connecting the units as shown below.

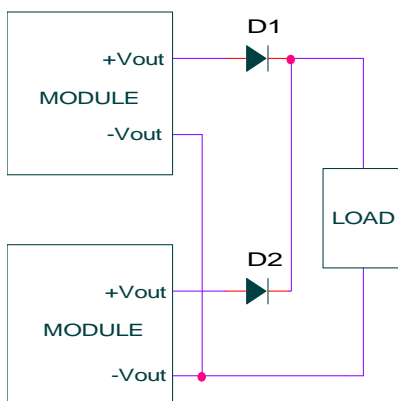

#### Series operation


Series operation is available by connecting the outputs of two or more power supplies, as shown below. Output current in series connection should be lower than the lowest current in each unit. (Please use schottky barrier diode)

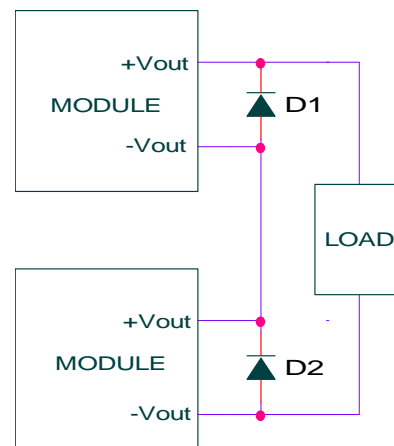

#### Thermal Considerations

eFS30 series has wide operating temperature range from  $-10^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$ .

However, it should be required a enough air flow for more reliable operation. Output derating curve provide designers with a quantity of a current under the desired ambient temperature and velocity of a airflow.

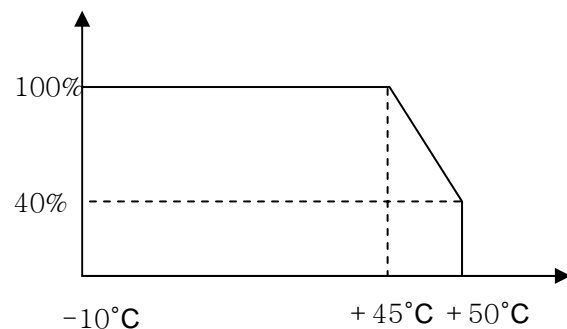



**eFS30 Series – Isolated AC/DC Converters**  
85 – 264Vac Input, Maximum Power: 30W

Data Sheet  
Jul 01, 2015

### Feature Description

#### Input Fuse

In order to comply with safety requirements, eFS30 series has a fuse built in.

#### Input Output Filter

eFS30 series have an internal EMI filter. To reduce conducted noise, additional external input filter is required

To reduce a output ripple and noise, external capacitor is required at the output of the device

#### Over current Protection (OCP)

eFS30 series built in over current protection circuit which operates when the output current is over 105% of rating and automatically recovers when over current condition is removed  
If the short or overload condition continues, the power module could be damaged.

#### Over Voltage Protection (OVP)


eFS30 series built in overvoltage protection circuit. When the OVP trigger, the output will be shut down. The input must be taken out(for at least five seconds), and than re-inputted manually. Otherwise, the module will not operate.

#### Soldering Information

The product is intended for through hole mounting in a PCB, When wave soldering is used, the temperature on the pins is specified to maximum 260°C for maximum 10 seconds  
when hand soldering, care should be taken to avoid direct contact between the hot soldering iron tip and the pins for more than a few seconds in order to prevent overheating.

#### EMI Characteristic (conducted Emission)

In order to reduce conducted noise install an external input filter as shown in below.

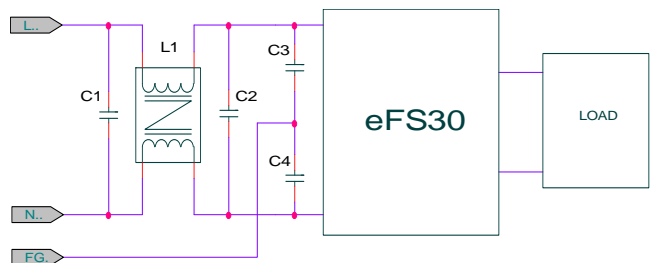

| Model Number | L1   | C1    | C2  | C3,C4  |
|--------------|------|-------|-----|--------|
| eFS30-12     | 10mH | 330nF | 1uF | 2200pF |
|              |      |       |     |        |


Complies with CISPR 22 CLASS B

**eFS30 Series – Isolated AC/DC Converters**  
 85 – 264Vac Input, Maximum Power: 30W

Data Sheet  
 Jul 01, 2015

## Pin assignments

TOP VIEW

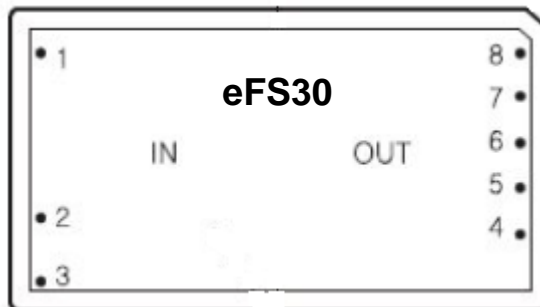

### Single Output

| PIN NO | NAME   | FUNCTION                        |
|--------|--------|---------------------------------|
| 1      | FG     | Frame Ground                    |
| 2      | AC(L)  | AC Input                        |
| 3      | AC(N)  | AC Input                        |
| 4      | NC     | No connection                   |
| 5      | No pin |                                 |
| 6      | +Vout  | Positive side of output voltage |
| 7      | No pin |                                 |
| 8      | -Vout  | Negative side of output voltage |

### Dual Output


| PIN NO | NAME   | FUNCTION                        |
|--------|--------|---------------------------------|
| 1      | FG     | Frame Ground                    |
| 2      | AC(L)  | AC Input                        |
| 3      | AC(N)  | AC Input                        |
| 4      | No pin |                                 |
| 5      | +Vout  | Positive side of output voltage |
| 6      | COM    | Common ground                   |
| 7      | -Vout  | Negative side of output voltage |
| 8      | No pin |                                 |

## eFS30 Series – Isolated AC/DC Converters

85 – 264Vac Input, Maximum Power: 30W

Data Sheet  
Jul 01, 2015

### Mechanical Specification

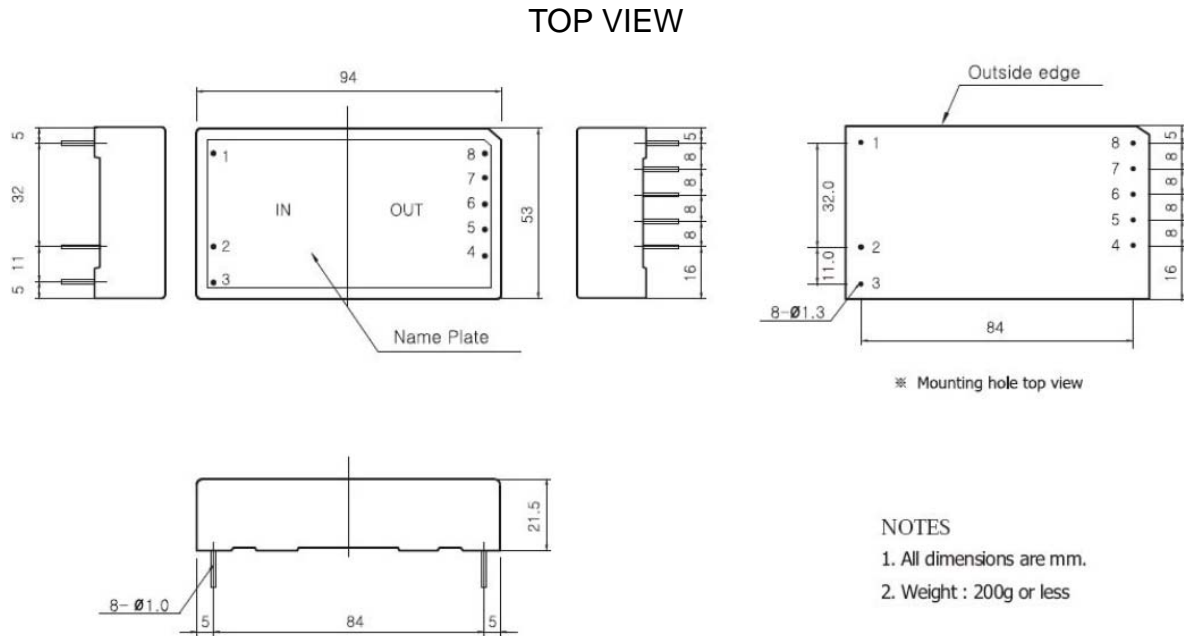

### Ordering Information

| Input     | Output1,<br>Output2       | Maximum<br>Power | Ripple & Noise<br>Typ. | Efficiency<br>Typ. | Model<br>Number |
|-----------|---------------------------|------------------|------------------------|--------------------|-----------------|
| 85 – 264V | 3.3V@6A                   | 19.8W            | 80mVp-p                | 77%                | eFS30-3R3(C)    |
|           | 5V@6A                     | 30W              | 80mVp-p                | 81%                | eFS30-5(C)      |
|           | 12V@2.5A                  | 30W              | 120mVp-p               | 85%                | eFS30-12(C)     |
|           | 15V@2A                    | 30W              | 150mVp-p               | 87%                | eFS30-15(C)     |
|           | 24V@1.25A                 | 30W              | 200mVp-p               | 88%                | eFS30-24(C)     |
|           | +12V@1.25A,<br>-12V@1.25A | 30W              | 120mVp-p               | 86%                | eFD30-1212(C)   |
|           | +15V@1A,<br>-15V@1A       | 30W              | 150mVp-p               | 87%                | eFD30-1515(C)   |

\* (C): Chassis mount type






**eFS30 Series – Isolated AC/DC Converters**  
85 – 264Vac Input, Maximum Power: 30W

Data Sheet  
Jul 01, 2015

**Part number structure**

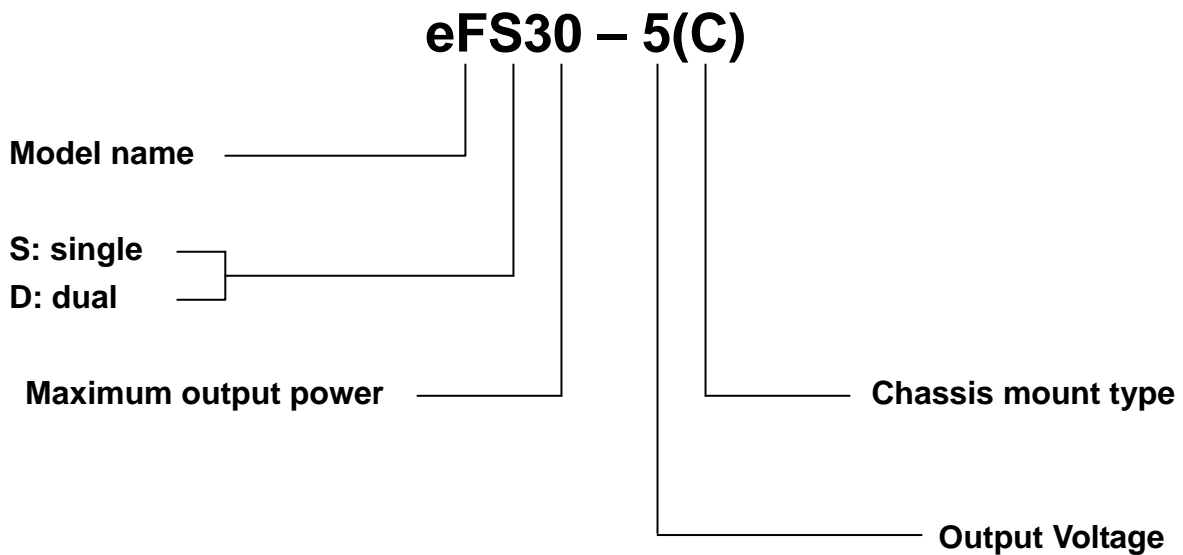

No part of this publication may be copied, transmitted, or stored in a retrieval system or reproduced in any way including, but not limited to, photography, photocopy, or Other recording means, without prior written permission from Powerplaza co.,Ltd



**HEAD OFFICE & FACTORY**

#1401, 14F/L 6th Daeryung TechnoTown 493-6,  
Gasam-Dong, Kumchon-Gu, Seoul, 153-803,  
Korea  
TEL: +82 2 855 4955 | FAX: +82 2 855 4954

**GENERAL SALES INQUIRIES**

Please feel free to  
contact : [sales@powerplaza.co.kr](mailto:sales@powerplaza.co.kr)

©2011 Powerplaza co.,Ltd. Specification subject to change without notice